




NXT® Pedestal Support Tray

DS-65498-0826

**Globally Proven
Construction Solutions**

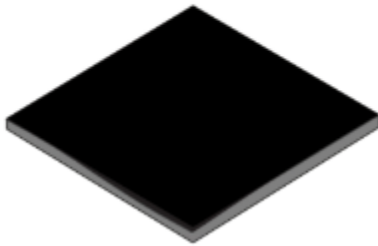

1. PRODUCT NAME

NXT® Pedestal Support Tray

2. MANUFACTURER

LATICRETE International, Inc.

1 LATICRETE Park North

Bethany, CT 06524-3423 USA

Telephone: +1.203.393.0010, ext. 1235

Toll Free: 1.800.243.4788, ext. 1235

Fax: +1.203.393.1684

Website: laticrete.com

3. PRODUCT DESCRIPTION

The NXT Pedestal Support Tray provides additional structural support for porcelain tiles or concrete pavers installed on NXT Pedestal Systems. Installed directly on top of the pedestal head, the tray helps distribute point loads evenly, reducing stress on individual tiles and improving overall system stability. In the event of a cracked or broken tile or paver, the support tray helps contain fragments, adding an extra layer of safety for pedestrian traffic. Ideal for rooftop, plaza, and terrace installations where enhanced performance and safety are required.

Uses

The NXT Pedestal Support Tray is a system accessory engineered to provide secondary support beneath tiles or pavers in pedestal installations. Designed to enhance safety, it helps mitigate risk by supporting surface materials in the event of breakage, reducing the potential for system failure or injury. Designed to be used beneath tiles or pavers to provide secondary support. It is ideal

for elevated outdoor applications such as rooftops, balconies, terraces, and podium decks where an added layer of safety is desired.

Applications include:

- Paver install in pedestal system (porcelain, stone, concrete, etc.)
- Paved areas or raised timber
- Timber decking
- Rooftop decks and amenity spaces
- Balconies and terraces

Advantages

- Enhances system safety by providing a secondary support layer beneath tiles and pavers
- Reduces risk of failure in the event of cracked or broken surface materials
- Distributes point loads more evenly, reducing stress on individual tiles or pavers and improving installation durability
- Supports installer confidence in elevated pedestal applications
- Seamlessly integrates with the NXT Pedestal System components

Suitable Substrates

- Concrete and Masonry Surfaces
- Exterior Glue Plywood decks that have been waterproofed with a primary roof waterproofing membrane
- Metal/Steel
- Decks
- Patios
- Tile or Stone

Packaging

6 Pieces Per Carton

Approximate Coverage

Coverage:

2' x 2' = 4sqft

Limitations

- DO NOT install tray upsidedown
- DO NOT install in applications exceeding the load capacity of the pedestal system or tray (Check Pedestal DS 65455)

- DO NOT use as a standalone structural component—tray must be used in conjunction with an approved pedestal support system.

Technical and Safety Literature

To acquire technical and safety literature, please visit our website at laticrete.com.

4. TECHNICAL DATA

Specifications subject to change without notification. Results shown are typical but reflect test procedures used. Actual field performance will depend on installation methods and site conditions.

5. INSTALLATION

Installation Instructions

Step 1: Ensure the substrate is clean, smooth and free of debris. Step 2: Install and adjust NXT Pedestals to the required height. To avoid the support tray flexing, suggested pedestal placement is no greater than 24" x 24" apart. Step 3: Insert lower nutserts and spacer tabs into each pedestal. Step 4: Place the NXT Pedestal Support Tray on each pedestal corner and confirm it is level. Step 5: Install paver spacer tabs at intersections and secure using the stainless steel retainer and screw. Step 6: Install pavers directly over the support tray. *For the highest performance, the paver can be adhered to the support tray.

6. AVAILABILITY AND COST

Availability

LATICRETE materials are available worldwide.

For Distributor Information, Call:

Toll Free: 1.800.243.4788

Telephone: +1.203.393.0010

For on-line distributor information, visit LATICRETE at laticrete.com

Cost

Contact a LATICRETE Distributor in your area.

7. WARRANTY

See 10. FILING SYSTEM:

- 5 Year Pedestals Product Warranty (US) (English)

9. TECHNICAL SERVICES

Technical Assistance

Information is available by calling the LATICRETE

Technical Service Hotline:

Toll Free: 1.800.243.4788, ext. 1235

Telephone: +1.203.393.0010, ext. 1235

Fax: +1.203.393.1948

LATICRETE International, Inc.

One LATICRETE Park North, Bethany, CT 06524-3423 USA • 1.800.243.4788 • +1.203.393.0010 • www.laticrete.com

© 2026 LATICRETE International, Inc. All trademarks shown are the intellectual properties of their respective owners.