




170 Insonorizante y Supresión de Grietas

DS-170E-0724

**Globally Proven
Construction Solutions**

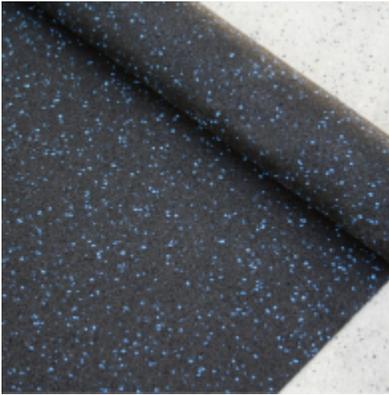

1. NOMBRE DEL PRODUCTO

170 Insonorizante y Supresión de Grietas

2. FABRICANTE

LATICRETE International, Inc.

1 LATICRETE Park North

Bethany, CT 06524-3423 USA

Teléfono: +1.203.393.0010, ext. 1235

Línea telefónica gratuita: 1.800.243.4788, ext.

1235

Fax: +1.203.393.1684

Sitio de Internet: laticrete.com

3. DESCRIPCIÓN DEL PRODUCTO

170.3 Sound & Crack Isolation Mat is a high performance acoustical underlayment system that muffles impact noises through ceramic tiles, stone and other hard surfacing materials. It also minimizes the transmission of cracks from the substrate to the tile installation up to 1/8" (3 mm), non-movement cracks. 170.3 Sound & Crack Isolation Mat is a 3 mm thick rubberized membrane comprised of 88.5% post-consumer recycled materials.

Usos

- Designed to be used under thin-bed adhesive for interior floor installations of ceramic tile, marble, stone, and brick to eliminate the transmission of impact noise from one floor to the floor below
- Isolates the transmission of stresses from the concrete base slab to the tile installation
- Combines low installed weight with minimal "above substrate" thickness

- To isolate cracks in tile work and reduce noise transmission, 170.3 Sound & Crack Isolation Mat should be applied to the entire substrate prior to the installation of ceramic tile, marble, stone, terrazzo and brick

Ventajas

- Isolates transmission of substrate cracks of up to 1/8" (3 mm) from transferring to the finished floor
- Delta IIC rating of 16 per ASTM E2179 (See PHYSICAL PROPERTIES)
- IIC rating of 44 per ASTM E492/ E989
- Load bearing - "Light" service rating per ASTM C627/TCA
- Meets ANSI A118.12 specifications*
- Easy and fast to install with standard tools
- * Interior dry applications only

Sustratos adecuados

Presentación

Rollo de 1.2 m x 11.3 m, 13.7 m² (4 pies x 37.5 pulg., 150 pies²)

Rendimiento aproximado

Approximate 150 ft² (13.9 m²) per roll

Limitaciones

- DO NOT bond to particle board, OSB, luan, Masonite® or hardwood surfaces.
- For horizontal use over suitable interior substrates only.
- DO NOT double stack pallets.
- Not for use over expansion joints or structural movement cracks.
- 170.3 Sound & Crack Isolation Mat is not intended for use as a waterproofing membrane.
- Adhesives/mastics, mortars and grouts for ceramic tile, pavers, brick and stone are not replacements for waterproofing membranes. When a waterproofing membrane is required, use a LATICRETE® Waterproofing Membrane (see Section 10 FILING SYSTEMS).
- Minimum tile size to be installed over 170.3 Sound & Crack Isolation mat is 4"x4" (102 x 102 mm).

Precauciones

- During cold weather, protect finished work from traffic until fully cured.
- For green marble, resin backed or other moisture sensitive tile or stone, use LATAPOXY® 300 Adhesive, refer to Data Sheet 633.0.
- For white and light-colored marbles use 254 Platinum (WHITE).
- Keep out of reach of children.

4. DATOS TÉCNICOS

Propiedades físicas

Tested with LATICRETE polymer fortified thinset

Property	Test Method	Results
Shear Bond – 28 day	ANSI A118.13 (5.1.5)	81 psi (0.6 MPa) (specification 50)
Point Load	ANSI A118.12 (5.2)	1260 psi (8.3 MPa)
Impact Insulation Class (IIC)	ASTM E2179 (Delta) ASTM E989	Delta IIC 14*
Robinson Floor Test	ASTM C627	LIGHT
Sound Transmission Class (STC)	ASTM E90 ASTM E413	57
Impact Insulation Class (IIC)	ASTM E492 ASTM E989	45

* IIC Rating based on independent laboratory tests. Complete test report available upon request.

Las especificaciones están sujetas a cambios sin notificación. Los resultados exhibidos son representativos pero reflejan los procedimientos de prueba utilizados. El desempeño real en el área de trabajo dependerá de los métodos de instalación y de las condiciones del lugar.

5. INSTALACIÓN

- Surface Preparation Concrete shall be in place for 28 days (minimum) and shall be dry. The surface shall have a smooth finish and be free of voids, sharp protrusions and loose aggregate. All surfaces should be between 40°F (4°C) and 90°F (32°C) and structurally sound, clean and free of all dirt, oil, grease, paint, concrete sealers or curing compounds and cement laitance. Rough or uneven concrete surfaces should be made smooth with a modified portland cement underlayment to provide a wood float or better finish. Do not level with gypsum or asphalt based products. Refer to Technical Data Sheet 152 “Bonding Ceramic Tile, Stone or Brick Over Wood Floors” (refer to section 10, FILING SYSTEMS). Installer must verify that deflection under all live, dead and impact loads of interior plywood floors does not exceed industry standards of L/360 for ceramic tile and brick or L/480 for stone installations where L=span length. Minimum construction for interior plywood floors. SUBFLOOR: 5/8" (15 mm) thick exterior glue plywood, either plain with all sheet edges blocked or tongue and groove, over bridged joists

spaced 16" (400 mm) o.c. maximum; fasten plywood 6" (150 mm) o.c. along sheet ends and 8" (200 mm) o.c. along intermediate supports with 8d ring-shank, coated or hot dip galvanized nails (or screws); allow 1/8" (3 mm) between sheet ends and 1/4" (6 mm) between sheets edges; all sheet ends must be supported by a framing member; glue sheets to joists with construction adhesive. UNDERLAYMENT: 5/8" (15 mm) thick exterior glue plywood fastened 6" (150 mm) o.c. along sheet ends and 8" (200 mm) o.c. in the panel field (both directions) with 8d ring-shank, coated or hot dip galvanized nails (or screws); allow 1/8" (3 mm) to 1/4" (6 mm) between sheets and 1/4" (6 mm) between sheet edges and any abutting surfaces; offset underlayment joists from joints in subfloor and stagger joints between sheet ends; glue underlayment to subfloor with construction adhesive. Refer to Technical Data Sheet 152 “Requirements for Direct Bonding of Ceramic or Stone Tiles Over Wood Floors” for complete details. Application Perimeter Isolation Strip It is essential that all walls and building elements are isolated from the floor. The use of acoustical ceiling panels in the space below would provide additional sound control. Note: It is recommended to install a perimeter isolation strip before placing and trimming 170.3 Sound & Crack Isolation Mat. Attach the perimeter isolation strip to the perimeter wall of the entire subfloor, as well as around the perimeter of any protrusions, in order to isolate or break the vibration transmission path between the floor and the wall. Temporarily fasten perimeter isolation strip in place with masking, duct, or carpet tape. The perimeter isolation strip can then be removed after the tiles have set firm. The joints can then be filled with an appropriate acoustical sealant. Note: As an alternative to perimeter isolation strip, the installer may run the sheets of 170 Sound & Crack Isolation mat up the wall approximately 3" (75 mm). This should take place throughout the entire perimeter of the room as well as around the perimeter of any protrusions in order to isolate or break the vibration transmission path between the floor and the wall. 170.3 Sound & Crack Isolation Mat Installation instructions: Use a polymer fortified multipurpose thin set adhesive (e.g. 254 Platinum) to adhere the 170.3 Sound & Crack Isolation Mat to the substrate. Use a 1/4" x 1/4" (6 mm x 6 mm) notched trowel and comb mortar over substrate, apply only enough mortar as can be covered within 25 minutes. Unroll the 170.3 Sound & Crack Isolation Mat into place, in the thin set adhesive mortar. Once installed, use a 25–45 lbs (11.3–20 kg) roller to embed the 170.3 Sound & Crack Isolation Mat firmly into the thin set adhesive mortar. Allow to cure for 24 hrs at 70°F (21°C). Install 170.3 Sound & Crack Isolation Mat over the area to be treated, do not overlap edges but be sure edges of each piece butt firmly together. Trim length of mat to desired length and width. Once fully cured, install ceramic tile, porcelain or stone finish directly over the 170.3 Sound & Crack Isolation Mat using a polymer fortified multipurpose thin set

adhesive. Follow instructions on adhesive packaging (refer to section 10, FILING SYSTEMS).

6. DISPONIBILIDAD Y COSTO

Disponibilidad

Los materiales LATICRETE® y LATAPOXY® están disponibles en todo el mundo.

Para obtener información sobre los distribuidores, llame a:

Línea telefónica gratuita: 1.800.243.4788
Teléfono: +1.203.393.0010

Para obtener información sobre los distribuidores en Internet, visite LATICRETE en laticrete.com

Costo

Comuníquese con un distribuidor de LATICRETE de su zona.

7. GARANTÍA

Consulte la Sección 10. SISTEMAS ESPECIALES:

- 25 Year System Warranty (US) (English)
- 5 Year System Warranty (US) (English)
- 10 Year System Warranty (US) (English)
- 1 Year Product Warranty (US) (English)

8. MANTENIMIENTO

LATICRETE and LATAPOXY grouts require routine cleaning with a neutral pH soap and water. All other LATICRETE and LATAPOXY materials require no maintenance but installation performance and durability may depend on properly maintaining products supplied by other manufacturers.

9. DEPARTAMENTO DE ASISTENCIA TÉCNICA

Asistencia técnica

Para obtener más información, comuníquese con la Línea Directa del Departamento de Asistencia Técnica de LATICRETE:

Línea telefónica gratuita: 1.800.243.4788, ext. 1235
Teléfono: +1.203.393.0010, ext. 1235
Fax: +1.203.393.1948

Material informativo sobre aspectos técnicos y de seguridad

Para obtener material sobre aspectos técnicos y de seguridad, visite nuestro sitio web en laticrete.com.

10. SISTEMAS ESPECIALES

Podrá obtener más información sobre los productos en nuestro sitio web laticrete.com. A continuación, encontrará una lista de documentos afines:

- DS 230.13: LATICRETE Product Warranty
- DS 230.05: LATICRETE 5 Year System Warranty (United States and Canada)
- DS 025.0: LATICRETE 25 Year System Warranty (United States and Canada)