



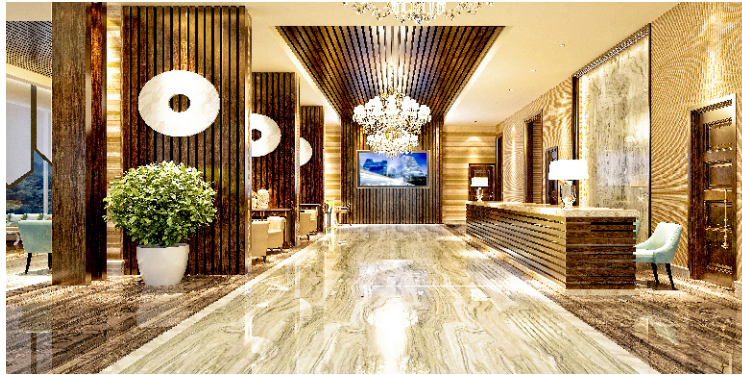

# FRACTURE BAN® 90

## Anti-Fracture Membrane with Sound Control

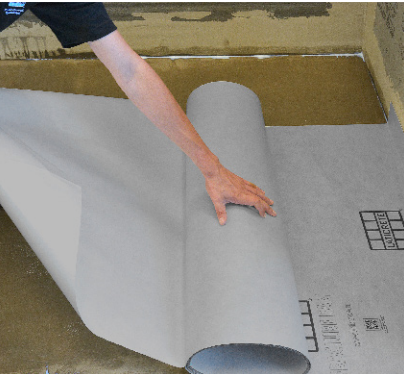

Data Sheet 155



### FEATURES

Peel & stick membrane providing anti-fracture protection and sound reduction

Durable polyester non-woven face with adhesive (90 mil thickness)

“Heavy” rating - ASTM C627 Robinson Floor Test

ASTM E2179 IIC Rating 45 / Δ IIC 17

Grey non-woven surface

### BENEFITS

Single multi use product for commercial and residential interior installations

Prevents in plane cracks up to 3/8" (9.5 mm)

Withstands vehicle and commercial traffic

Reduces impact sound transmission

Easy chalk line identification

#### Suitable Substrates

- Concrete slabs, cement mortar beds
- Exterior glue plywood, (interior only)
- Oriented strand board (OSB)
- Precast floor panels
- Gypsum underlayments
- Radiant heated floors
- Ceramic tile, terrazzo, stone
- Self-leveling and patching compounds
- Backer board
- Existing VAT, VCT and vinyl floors

#### Available Colors

Grey

#### Packaging

100 ft<sup>2</sup> (9.3 m<sup>2</sup>); 39.25" x 30.6' (1 m x 9.33 m)  
24 rolls/pallet

\*See Data Sheet 025.0 for complete warranty information.

#### Uses

- Residential and commercial
- Retail, malls and stores
- Offices, hotel/motel, hospitals
- Apartment and condo buildings

#### Approximate Coverage

100 ft<sup>2</sup> (9.3 m<sup>2</sup>) per roll



Scan for more information.



Primer Plus required for the installation of FRACTURE BAN® 40

DS-65437

