



Discover the 1 Family



Install Smarter. Just Use 1.



Made In USA

For the Builders of a Better World®

Why Use 1?

One Purpose: Performance Made Easy.

Engineered for simplicity, built for performance.

The LATICRETE 1 system of products helps you work smarter with fewer steps – giving you consistent, professional-grade results with less hassle on every job.

- Simplify without compromise – consistent results, fewer callbacks.
- Meets or exceeds industry standards – performance you can trust.
- Reduced steps to save time – faster jobs, more profit.
- Cleaner, safer installs for happier crews and clients.

**WATERPROOF,
SET,
GROUT.**



All products meet or exceed industry performance standards.

Check data sheets for specific tests and compliance.

HYDRO BAN® 1



Available in 1, 3.5, and 5 gallons.

Single-coat, trowel-applied liquid waterproofing and crack isolation membrane.

- Meets or exceeds ANSI A118.10 and A118.12
- ASTM E96: rated for steam showers and steam rooms
- IAPMO and ICC approved
- No fabric required
- Self-gauging trowel application
- Cure indicator – color-changing technology
- Ready for flood testing 2 hours after cure[†]
- Bonds to all common substrates, including metal, PVC, ABS, copper, brass
- High-vis color
- Extra Heavy Robinson Rating
- Cures effectively even when substrate temperatures are at or above 35°F (2° C)



Uses & Applications

- Interior and exterior
- Swimming pools, fountains and, water features
- Shower pans, stalls, and tub surrounds
- Steam rooms and steam showers
- Spas and hot tubs


Industrial, commercial, and residential bathrooms and laundries

Kitchens and food processing areas

Terraces and balconies over unoccupied spaces

[†]HYDRO BAN 1 can be flood tested in 2 to 3 hours when the waterproofing membrane is cured, and the substrate is 70°F (21°C) and 50% RH or greater for 2 hours. The curing time starts when the HYDRO BAN 1 color has changed from a hi-vis green to a dark shade indicating a cured liquid waterproofing membrane. If the substrate and the air temperature are lower than 70°F (21°C) and 50% RH, flood testing cannot be performed until the HYDRO BAN 1 color has changed from a light to a darker shade and then 24 hours has lapsed.

MULTIMAX™ 1

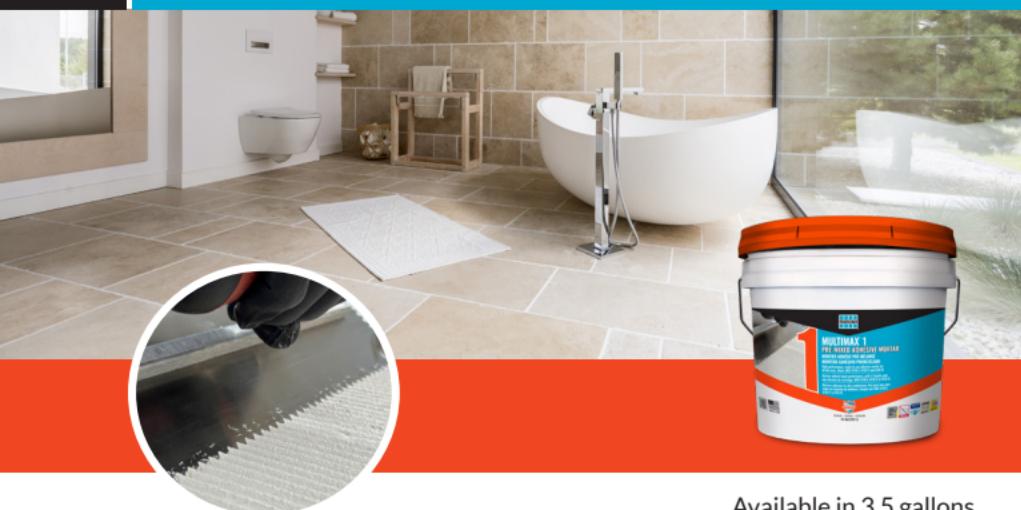

Available in 3.5 gallons.

High performance, patent-pending, ready-to use adhesive mortar for all tile sizes.

- Exceeds ANSI A118.15 HET, A118.4 and A118.11 standards
- Premixed, ready-to-use formula
- Outperforms traditional mortars and mastics
- High bond strength with non-sag and non-slump properties
- Ideal for large and heavy tile (LHT) and gauged porcelain tile panels (GPTP) on walls and floors
- Approved for submerged applications
- Smooth, creamy, easy-to-trowel texture
- Superior workability reduces installer fatigue and increases speed of application
- Resealable and reusable packaging



Uses & Applications

Interior and exterior

Walls and floors

Stone and ceramic, porcelain, and glass tile installations

GPTP¹ or LHT²

Flooring installations

Bathrooms, showers, pools, steam rooms, fountains, and other submerged or wet areas

¹Gauged Porcelain Tile Panels.

²Large and Heavy Tile

SPECTRALOCK® 1



Available in 1 gallon.

Pre-mixed tile grout with epoxy performance.

- Strongest pre-mixed grout on the market – meets ANSI A118.3[‡]
- Stainproof*; no sealing required
- No mixing required, resealable packaging
- Light foot traffic within 6 hours
- Uniform color consistency
- Available in all 40 LATICRETE standard colors + translucent
- Metallic and glow-in-the-dark SPECTRALOCK^{zzvvv} DAZZLE™ options available



Uses & Applications

Ceramic tile, glass tile, and stone

Submerged and intermittent wet areas

Residential and commercial
Interior and exterior floors
and walls[^]

Ideal for re-grouting applications

*Stainproof (residential installation only) to common household cleaners, liquids and other goods.
Clean all spills immediately.

[‡]Meets or exceeds ANSI A118.3 specific test designation 5.6.

[^]Not for exterior facades.



JUST USE 1.

**Fewer steps. Easier to use.
Professional-grade results.**

The 1 system from LATICRETE brings together industry-first solutions across waterproofing, adhesive mortar, and grout – designed to save time, reduce steps, and deliver professional-grade results.

Ready to simplify your next install?

Discover how much more efficient your next job can be.
laticrete.com/JustUse1



LATICRETE International, Inc. • One LATICRETE Park North, Bethany, CT 06524-3423 USA
1.800.243.4788 • 1.203.393.0010 • laticrete.com

DS-10251-A-0126 ©2026 LATICRETE International, Inc. All trademarks shown are the intellectual properties of their respective owners.