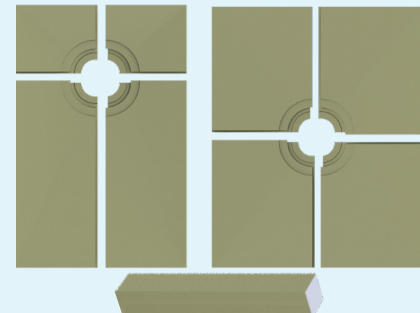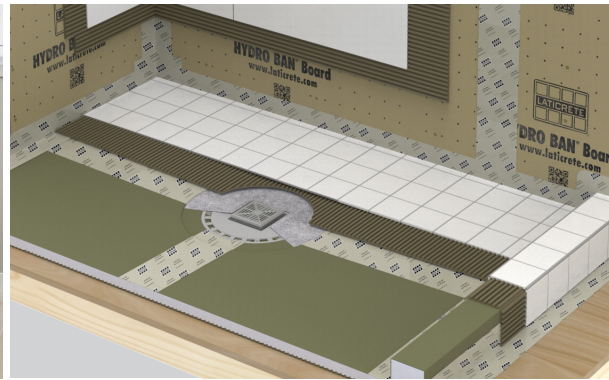# HYDRO BAN® Modular Pre-Sloped Shower Pan & Preformed Curb

Pre-sloped, tile-ready shower pans in modular designs with compatible flat-edge curbs.

Data Sheet 65482

LIGHTWEIGHT* · RAPID INSTALL* · SIZABLE ON-SITE* · STEAM ROOM RATED* · FULL SYSTEM INTEGRATION™ · c ICC ES™ · c UPC ® · LIFETIME WARRANTY*

FEATURES	BENEFITS
Available in 7 pan sizes and 3 curb lengths	Center and off-center drain configurations and flat-edge curb options ensure flexible layout and installation
Pre-waterproofed and tile-ready	Ready to install out of the box – no waterproofing steps or cure time needed, just set and tile
Lightweight and durable foam construction	Easy to carry, cut, and install – less strain, faster handling
Site-sizable components	Custom-fit on site with standard tools allows for greater installation flexibility and reduced waste
Multi-piece pan, flat-pack design	Easier to store, ship, and maneuver – ideal for compact storage and tight jobsite access
Fully compatible with the HYDRO BAN® Shower System	Seamless integration with LATICRETE® shower components ensures optimal performance and installation consistency

PACKAGING	UNIT OF MEASURE	SKU
Pre-Sloped Shower Pan		
Center Drain - 38" x 38" (96.52 cm x 96.52 cm)	1 piece/box	9241-3838-CPC
Center Drain - 38" x 60" (96.52 cm x 152.4 cm	1 piece/box	9241-3860-CPC
Center Drain - 48" x 48" (121.9 cm x 121.9 cm	1 piece/box	9241-4848-CPC
Center Drain - 48" x 60" (121.9 cm x 152.4 cm)	1 piece/box	9241-4860-CPC
Center Drain - 60" x 60" (152.4 cm x 152.4 cm)	1 piece/box	9241-6060-CPC
Center Drain - 72" x 72" (182.9 cm x 182.9 cm)	1 piece/box	9241-7272-CPC
Center Drain - 48" x 72" (121.9 cm x 182.9 cm)	1 piece/box	9241-4872-CPC
Off Center Drain - 38" x 60" (96.52 cm x 152.4 cm)	1 piece/box	9241-3860-OCPC
Preformed Curb		
24" (61 cm)	1 piece/box	9241-0024-CC
48" (122 cm	1 piece/box	9241-0048-CC
72" (183 cm)	1 piece/box	9241-0072-CC

Uses
- Interior use only
- Industrial, commercial and residential bathrooms where a pre-sloped shower pan is required
- Stalled gang showers
- Pet showers

Suitable Substrates
- Concrete
- Exterior Glue Plywood (Interior only)
- Cement Backer Board
- Oriented Strand Board (OSB)

Applicable Standards
- ANSI A118.10
- ANSI A118.12
- ASTM D4068
- IAPMO-PS-46
- ICC

Scan for more information